International IOR Rectifier IRFK4H150,IRFK4J150

Isolated Base Power HEX-pak™ Assembly - Parallel Chip Configuration

- High Current Capability.
- UL recognised E78996.
- Electrically Isolated Base Plate.
- Easy Assembly into Equipment.

Description

The HEX-pak™ utilises the well-proven HEXFET™ die, combining low on-state resistance with high transconductance. These superior technology die are assembled by state of the art techniques into the TO-240 package, featuring 2.5kV rms isolation and solid M5 screw connections. The small footprint means the package is highly suited to power applications where space is a premium. Available in two versions, IRFK.H... for fast switching and IRFK.J... for oscillation sensitive applications.

V_{DS} = 100V

$R_{DS(on)}$ = 14mΩ

I_D = 145A

Absolute Maximum Rating

	Parameter	Max.	Units
I_D @ T_C=25°C	Continuous Drain Current	137	A
I_D @ T_C=100°C	Continuous Drain Current	90	A
I_{DM}	Pulse Drain Current	580	A ①
P_D @ T_C=25°C	Maximum Power Dissipation	500	W
V_{GS}	Gate-to-Source Voltage	20	V
V_{INS}	R.M.S. Isolation Voltage, circuit to base	2.5	kV
T_J	Operating Junction Temperature Range	-40 to 150	°C
T_{STG}	Storage Temperature Range	-40 to 150	°C

Thermal and Mechanical Specifications

	Parameter	Min.	Typ.	Max.	Units
R_{thJC}	Junction-to-Case	-	-	0.25	K/W ②
R_{thCS}	Case-to-Sink, smooth & greased surface	-	0.1	-	K/W
T	Mounting Torque +10%				③
	HEXpak to Heatsink	-	5	-	Nm
	Busbar to HEXpak	-	3	-	Nm
wt	Approximate Weight	-	140	-	g
		-	5	-	oz

Notes:

① - Repetitive Rating: Pulse width limited by maximum junction temperature see figure 8.

② - Per Module.

③ - A mounting compound is recommended and the torque should be rechecked after a period of three hours to allow for the spread of the compound.

Electrical Characteristics @ T_J = 25°C (Unless otherwise specified)

	Parameter		Min.	Typ.	Max.	Units	Test Conditions
B_{VDSS}	Drain-to-Source Breakdown voltage		100	-	-	V	V_{GS}=0V, I_D=1.0mA
$R_{DS(on)}$	Static Drain-to-Source On-State Resistance		-	11	14	mΩ	V_{GS}=10V, I_D=45A
$I_{D(on)}$	On-State Drain Current		145	-	-	A	V_{DS} > $I_{D(on)}$ x $R_{DS(on)}$max, V_{GS}=10V
$V_{GS(th)}$	Gate Threshold Voltage		2.0	-	4.0	V	V_{DS}=V_{GS}, I_D=1.0mA
g_{fs}	Forward Transconductance ④		50	80	-	S	V_{DS} > 50V, I_D=90A
I_{DSS}	Zero Gate Voltage Drain Current		-	-	1.0	mA	V_{DS}=V_{DS}max, V_{GS}=0v
			-	-	4.0	mA	V_{GS}=10V, T_C=125°C, V_{DS}=V_{DS}max x 0.8
I_{GSS}	Gate-to-Source Leakage Forward		-	-	400	nA	V_{GS}=20V
I_{GSS}	Gate-to-Source Leakage Reverse		-	-	-400	nA	V_{GS}=-20V
Q_g	Total Gate Charge		-	370	500	nC	I_D=145A, V_{GS}=10V, V_{DS}=V_{DS}max x 0.8
Q_{gs}	Gate-to-Source Charge		-	75	100	nC	
Q_{gd}	Gate-to-Drain ("Miller") Charge		-	175	250	nC	
$t_{d(on)}$	Turn-on Delay Time	IRFK4H150	-	65	-	ns	V_{DD}=40V, I_D=90A, V_{GS}=10V, R_{SOURCE}=3.3Ω
		IRFK4J150	-	75	-	ns	
t_r	Rise Time	IRFK4H150	-	350	-	ns	
		IRFK4J150	-	400	-	ns	
$t_{d(off)}$	Turn-off Delay Time	IRFK4H150	-	230	-	ns	
		IRFK4J150	-	300	-	ns	
t_f	Fall Time	IRFK4H150	-	130	-	ns	
		IRFK4J150	-	160	-	ns	
L_{DS}	Drain-to-Source Inductance		-	18	-	nH	
C_{iss}	Input Capacitance		-	10.4	-	nF	V_{GS}=0V, V_{DS}=25V, f=1.0MHz
C_{oss}	Output Capacitance		-	4.0	-	nF	
C_{rss}	Reverse Transfer Capacitance		-	1.0	-	nF	
	Linear Derating Factor		-	-	4	W/K	

Source-Drain Diode Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
I_S	Continuous Source Current (Body Diode)	-	-	150	A	
I_{SM}	Pulsed Source Current (Body Diode)	-	-	500	A	
V_{SD}	Diode Forward Voltage	-	-	2.5	V	V_{GS}=0V, I_S= 145A, T_C=25°C
t_{rr}	Reverse Recovery Time	90	190	390	ns	di/dt=400A/μs, T_J=150°C
Q_{rr}	Reverse Recovered Charge	3.0	6.4	14.0	μC	I_S=145A

Notes:

④ - Pulse Width ≤ 300μs; Duty cycle ≤ 2%.



Fig 1. Typical Output Characteristics, T_C=25°C



Fig 2. Typical Output Characteristics, T_C=150°C



Fig 3. Typical Transfer Characteristics

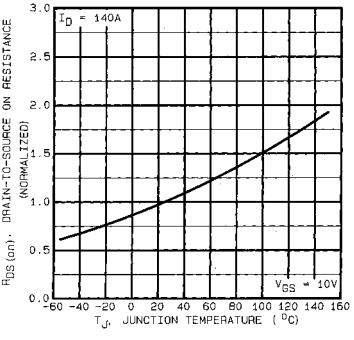

Fig 4. Normalized On-Resistance Vs. Temperature

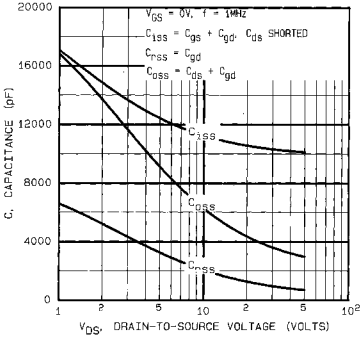

Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage



Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

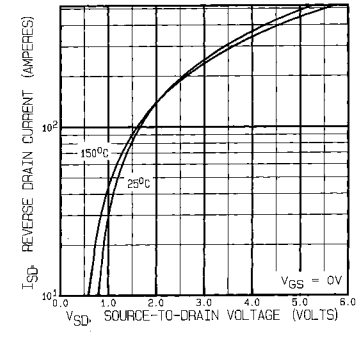

Fig 7. Typical Source-Drain Diode Forward Voltage



Fig 8. Maximum Safe Operating Area

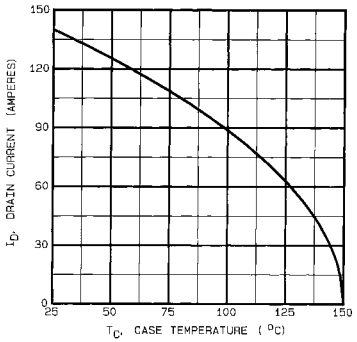

Fig 9. Maximum Drain Current Vs. Case Temperature

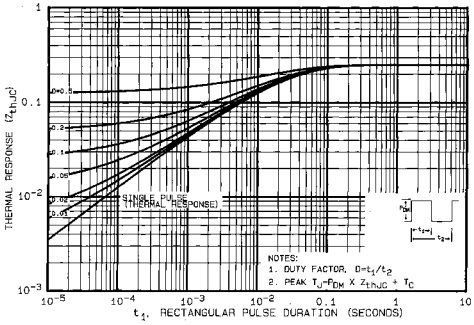

Fig 10. Maximum Effective Transient Thermal Impedance, Junction-to-Case

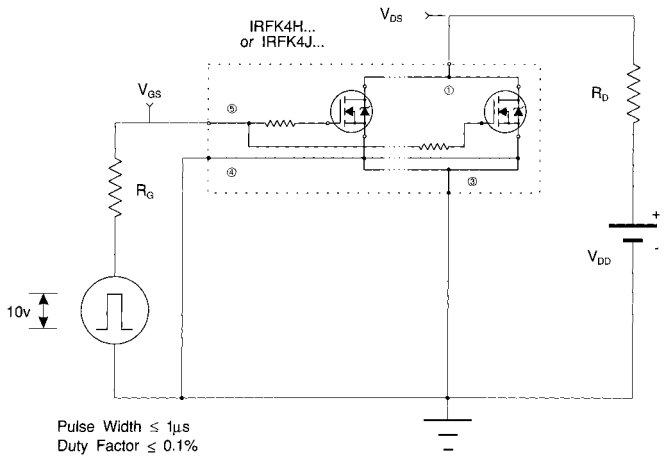

Fig 11a. Switching Time Test Circuit



Fig 11b. Switching Time Waveforms

Circuit Configuration and Outline

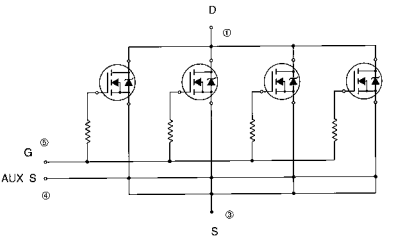

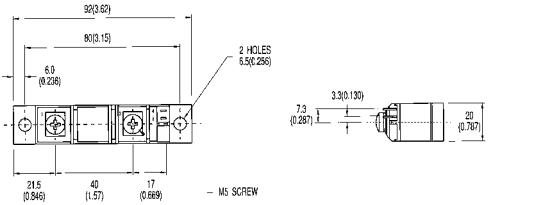

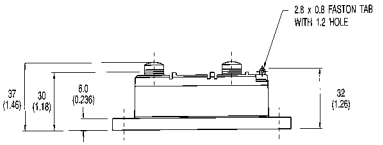

NOTE:
DEVICE IS SUPPLIED WITH
AUXILARY LEADS 200(7.87) LONG

All dimensions in millimetres (inches)

Part Numbering

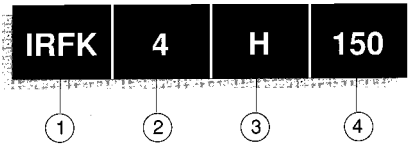

1. - HEX-pak Module.
2. - Number of HEXFETs in parallel.
3. - H - Fast switching.
   - J - Oscillation resistant for sensitive applications.
4. - Voltage code:- 054 - 60V
   150 - 100V
   250 - 200V
   350 - 400V
   450 - 500V
   C50 - 600V

WORLD HEADQUARTERS: 233 Kansas St., **EL SEGUNDO**, California 90245, USA. Tel:(213) 772-2000. Tlx:664464. Fax:(213) 772-9028
EUROPEAN HEADQUARTERS: Hurst Green, **OXTED**, Surrey RH8 9BB, UK. Tel.:(0883) 713215. Tlx:95219. Fax:(0883)714234.

CANADA: 101 Bentley St., Markham, **ONTARIO** L3R 3L1. Tel:(416)475-1897. Tlx:06-966-650. Fax:(416)475-8801
CZECHOSLOVAKIA: Macurova 19/1565, Box 30, 149 00 **PRAGUE**. Tel:(2) 792 6831. Fax:(2) 792 6831.
DENMARK: P.O. Box 70, Krogshoejvej 51, DK-2880 **BAGSVAERD**. Tel: (45) 44 37 71 50. Fax (45) 44 37 71 52.
FRANCE: 123 Rue de Petit Vaux, 91360 **EPINAY sur ORGE**. Tel:(1)64.54.83.29. Tlx:600943. Fax:(1)64.54.83.30.
FINLAND: **Billskogsvägen** 19, 02580 Sjundeå St. Tel:(0) 262 8144. Fax.(0) 262 8150.
GERMANY: Saalburgstr. 157, D-6380 **BAD HOMBURG**. Tel:(61)72 37066. Tlx:410404. Fax:(61)72 37065.
HUNGARY: Szent Istvan Park 15, H-1137 **BUDAPEST**. Tel:(1) 1298 822. Fax:(1) 1298 822.
HONG KONG: 202 Peter Building, 60 Queens Road Central, **HONG KONG**. Tel:(85) 252 38355. Fax: (85) 284 52908.
ITALY: Via Liguria 49, 10071 Borgaro, **TORINO**. Tel:(011)470 14 64. Tlx:221257. Fax:(011)470 42 90.
Via Zucca 8, 20017 Rho **MILANO**. Tel:(02)93 50 36 50. Fax:(02)93 50 36 55.
Via Arno 1, 40139 **BOLOGNA**. Tel:(05149 33 07. Fax:(051)49 54 80.
INDIA: 31 Greenacre, 5 Union Park, Khar (W), **BOMBAY** 400 052. Tel:(022)535026/533779/540242. Tlx:011-71481.
JAPAN: K & H Bldg. 2F, 3-30-4 Nishi-Ikebukuro, Toshima-ku, **TOKYO**, Japan 171. Tel:(03)983 0641. Fax:(03)983 0642.
SINGAPORE: HEX 10-01 Fortune Centre, 190 Middle Road, **SINGAPORE** 0718. Tel:(65)336 3922/337 4695/336 6286. Fax: (65)337 4692.
SWEDEN: Box: 88, S-162 12 Vallingby 1, **STOCKHOLM**. Tel:(08)870035. Fax:(08)874242.
SWITZERLAND: **CH-8032 ZURICH**, Kirchenweg 5. Tel:(01)386 8702/8686. Fax:(01)383 5108/2379.
U.S.A:
Central Zone: 2401 Plum Grove Road, Suite 111, **PALATINE**, IL60067. Tel:(312)397-0002. Fax:(312)397-0114.
Eastern Zone: 71 Grand Avenue, **PALISADES PARK**, NJ07650. Tel:(201)943-4554. Fax:(201)943-5754.
Southern Zone: 800 Office Plaza Blvd., Suite 401, **KISSIMMEE**, FL32743. Tel:(407)933-2383. Fax:(407)933-2293.
Western Zone: 222 Kansas Street, **EL SEGUNDO**, CA90245. Tel:(213)607-8886. Fax:(213)640-6533.

Sales Offices, Agents and Distributors in Major Cities throughout the World.

In the interest of product improvement INTERNATIONAL RECTIFIER reserves the right to change specifications at any time without notice.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.