

STANDARD CE STANDARD cULus E190173

M48

MOTORE SINCRONO MONODIREZIONALE 500 RPM 50 Hz

MONODIRECTIONAL SYNCHRONOUS MOTOR 500 RPM 50 Hz

DATI TECNICI / TECHNICAL DATA

VELOCITÀ/SPEED
500 rpm 50Hz - 600 rpm 60Hz

COPPIA/TORQUE
0.5 Ncm 50 Hz - 0,4 Ncm 60 Hz

OMOLOGAZIONE / CERTIFICATION
CE
UL - E190173 - Classe A (105°C)

DESCRIZIONE / DESCRIPTION

I motori sincroni funzionano esclusivamente con alimentazione in corrente alternata e di conseguenza la velocita' di rotazione e' rigidamente vincolata alla frequenza della tensione applicata. Può essere ordinato con rotazione oraria, antioraria o senza senso.

The synchronous motors work only from an alternate current and consequently their speed is strictly bound to the frequency of the power line wired. It could be ordered in clockwise, anticlockwise and no-sense rotation.

CARATTERISTICHE / FEATURES

Tensioni disponibili / Supply voltage :
12, 24, 48, 115, 230, 250 Vac +/-10%

DIMENSIONI / DIMENSIONS

in mm

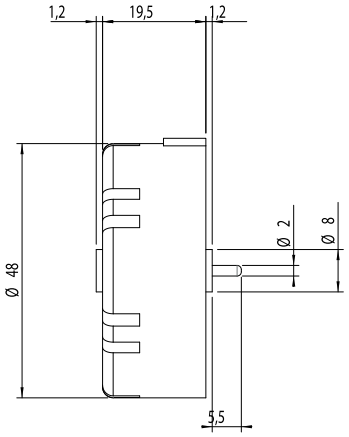

CODICE D'ORDINE

ORDER CODE

M48 X V F 0000000

	Direzione di rotazione/Rotation direction	
X	Orario/Clockwise	R
	Antiorario/Anticlockwise	L
	Senza senso / No sense	S
V	12V	A
	24V	B
	48V	C
	115V	D
	230V	E
	250V	K
	Frequenza/Frequency	
F	50Hz	5
	60Hz	6