FUJI ELECTRIC

6RI 50E-060/080

6-Pack Diode
600/800 V
50 A

POWER DIODE MODULE

Features

- All the terminals and the mounting plate are electrically isolated. These modules can be installed in the same cooling fin as other modules, thus saving installation space – a cost-effective feature.
- The diode chips are coated with a glass of zinc oxide, making them highly resistant to temperature and humidity variation.
- 6 diode chips are connected to the 3-phase bridge rectifying circuit inside the module-a cost-effective feature.

Applications

- Inverters for AC motors
- Power supply units for DC motors
- DC power supply units for battery chargers
- General purpose DC power supply units

■ Outline Drawings

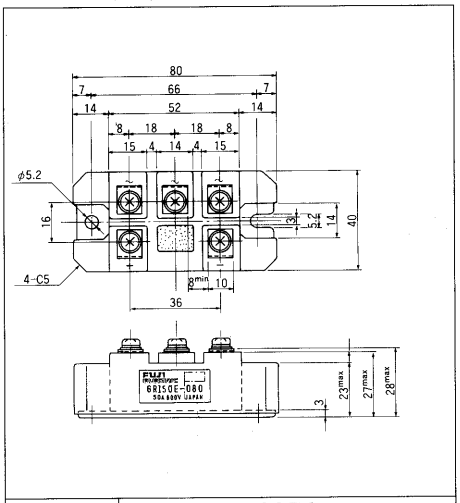

CASE	R605A

■ Inner Circuit Schematic

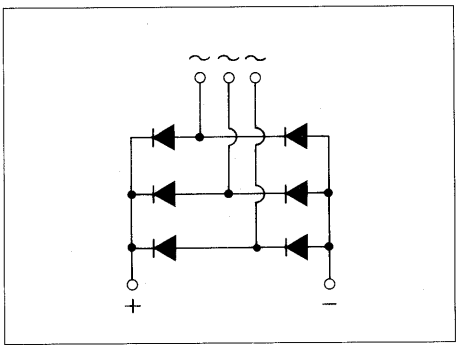

■ Maximum Ratings and Characteristics

• Absolute Maximum Ratings

Items	Symbols	Conditions	6RI50E		Units
			−060	−080	
Repetitive peak reverse voltage	V_{RRM}		600	800	V
Non-repetitive peak reverse voltage	V_{RSM}		660	880	V
Average output current	I_O	50/60 Hz Sinewave.T_C = 102°C	50		A
Surge current	I_{FSM}	Rated load conditions	480		A
I^2t	I^2t	Rated load conditions	920		A^2s
Junction temperature	T_j		−40~+150		°C
Storage temperature	T_{stg}		−40~+125		°C
Tightening torque		Mounting screw: M4	15±2		kg·cm
Vibration resistance			5		G
Dielectric strength		Between terminals and base	2000 VAC 1 min		
Net. Weight			150		g

• Electrical Characteristics

Items	Symbols	Conditions	Min	Typ	Max	Units
Forward voltage	V_{FM}	T_j=25°C, I_{FM}=50 A			1.20	V
Reverse current	I_{RRM}	T_j=150°C, V_R=V_{RRM}			5	mA

• Thermal Characteristics

Items	Symbols	Conditions	Min	Typ	Max	Units
Thermal resistance (Junction to case)	$R_{th(j-c)}$	50/60 Hz Sinewave, Thermal resistance for total loss			0.42	°C/W
Thermal resistance	$R_{th(c-f)}$	With thermal compound			0.10	°C/W

■ Characteristic curves

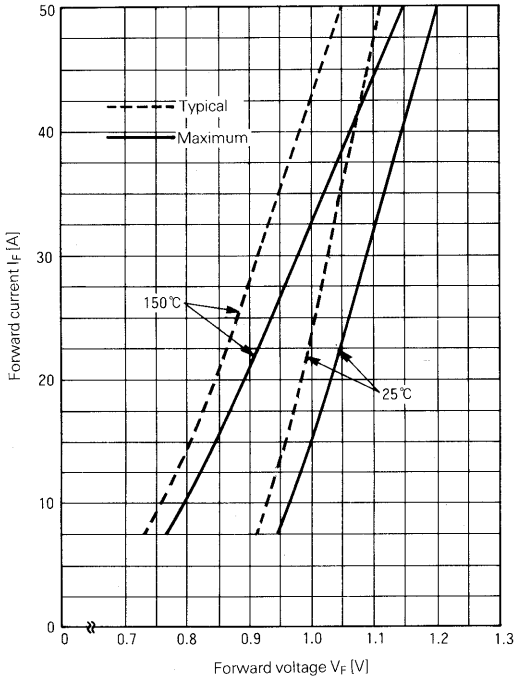

Forward Characteristics

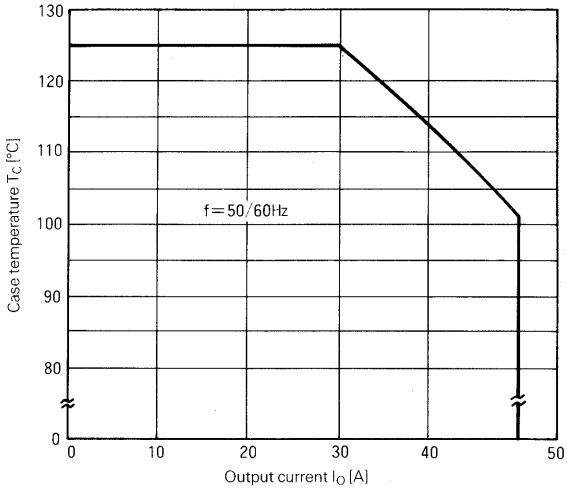

Case Temperature-Output Current

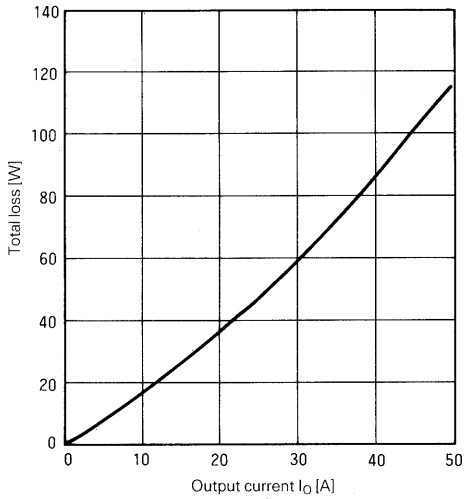

Output Curreut-Total Loss

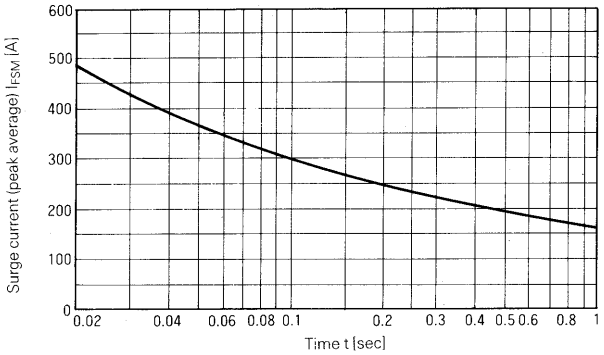

Surge Current

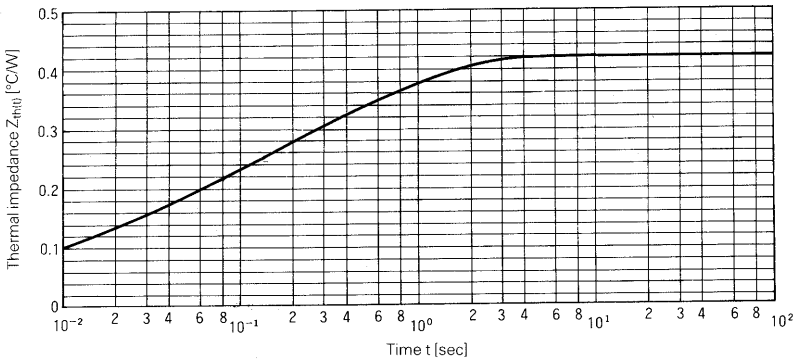

Transient Thermal Impedance

For more information, contact:

Collmer Semiconductor, Inc.
P.O. Box 702708
Dallas, TX 75370
972-733-1700
972-381-9991 Fax
http://www.collmer.com

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.