SKM 100GB128D



SEMITRANS™ 2

SPT IGBT Module

SKM 100GB128D

Features


- Homogeneous Si
- SPT = Soft-Punch-Through technology
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to 6 x I_c

Typical Applications

- AC inverter drives
- UPS
- Electronic welders at f_{sw} up to 20 kHz

Absolute Maximum Ratings	T_c = 25 °C, unless otherwise specified		
Symbol	**Conditions**	**Values**	**Units**
IGBT			
V_{CES}		1200	V
I_C	T_c = 25 (80) °C	145 (105)	A
I_{CRM}	t_p = 1 ms	150	A
V_{GES}		±20	V
T_{vj}, (T_{stg})	$T_{OPERATION} \leq T_{stg}$	- 40 ... + 150 (125)	°C
V_{isol}	AC, 1 min.	4000	V
Inverse diode			
I_F	T_c = 25 (80) °C	95 (65)	A
I_{FRM}	t_p = 1 ms	150	A
I_{FSM}	t_p = 10 ms; sin.; T_j = 150 °C	720	A

Characteristics	T_c = 25 °C, unless otherwise specified				
Symbol	**Conditions**	**min.**	**typ.**	**max.**	**Units**
IGBT					
$V_{GE(th)}$	V_{GE} = V_{CE}, I_C = 3 mA	4,5	5,5	6,45	V
I_{CES}	V_{GE} = 0, V_{CE} = V_{CES}, T_j = 25 (125) °C		0,1	0,3	mA
$V_{CE(TO)}$	T_j = 25 (125) °C		1 (0,9)	1,15 (1,05)	V
r_{CE}	V_{GE} = 15 V, T_j = 25 (125) °C		13 (16)	16 (20)	mΩ
$V_{CE(sat)}$	I_{Cnom} = 75 A, V_{GE} = 15 V, chip level		1,9 (2,1)	2,35 (2,55)	V
C_{ies}	under following conditions		6,2		nF
C_{oes}	V_{GE} = 0, V_{CE} = 25 V, f = 1 MHz		0,74		nF
C_{res}			0,71		nF
L_{CE}				30	nH
$R_{CC'+EE'}$	res., terminal-chip T_c= 25 (125) °C		0,75 (1)		mΩ
$t_{d(on)}$	V_{CC} = 600 V, I_{Cnom} = 75 A		175		ns
t_r	R_{Gon} = R_{Goff} = 4,7 Ω, T_j = 125 °C		38		ns
$t_{d(off)}$	V_{GE} = ± 15 V		370		ns
t_f			65		ns
E_{on} (E_{off})			9 (7,5)		mJ
Inverse diode					
V_F = V_{EC}	I_{Fnom} = 75 A; V_{GE} = 0 V; T_j = 25 (125) °C		2 (1,8)	2,5	V
$V_{(TO)}$	T_j = 25 (125) °C		1,05	1,3	V
r_T	T_j = 25 (125) °C		13	16	mΩ
I_{RRM}	I_{Fnom} = 75 A; T_j = 125 ( ) °C		88		A
Q_{rr}	di/dt = 2800 A/µs		13		µC
E_{rr}	V_{GE} = 0 V		3,9		mJ
Thermal characteristics					
$R_{th(j-c)}$	per IGBT			0,21	K/W
$R_{th(j-c)D}$	per Inverse Diode			0,5	K/W
$R_{th(c-s)}$	per module			0,05	K/W
Mechanical data					
M_s	to heatsink M6	3		5	Nm
M_t	to terminals M5	2,5		5	Nm
w				160	g

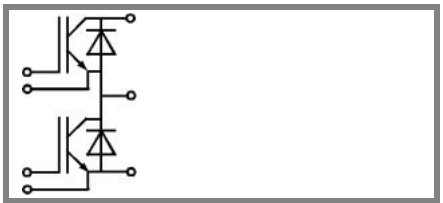

GB

© by SEMIKRON

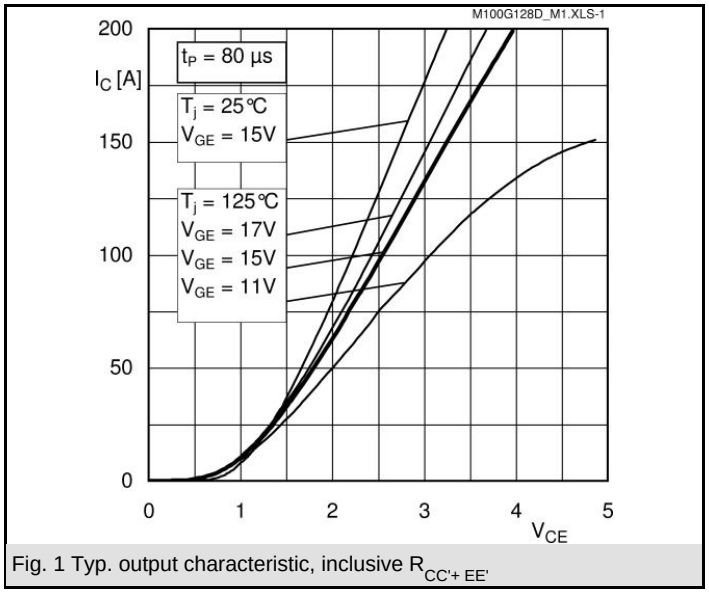


Fig. 1 Typ. output characteristic, inclusive $R_{CC'+EE'}$

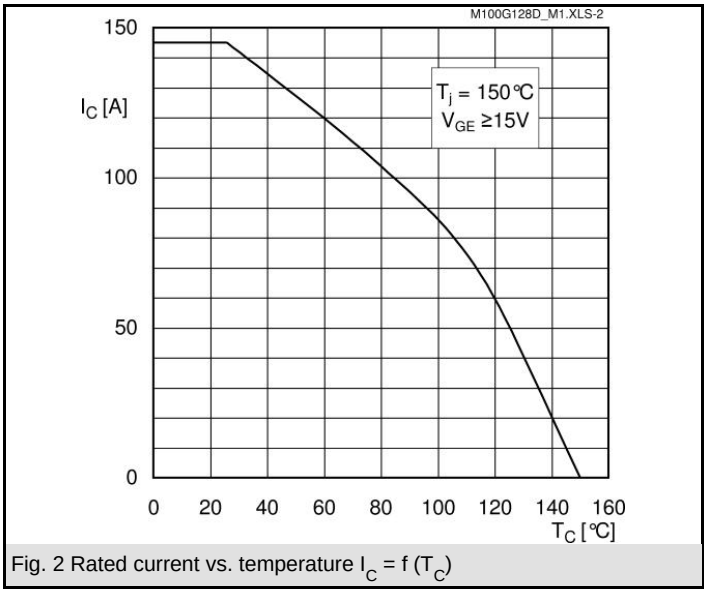


Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

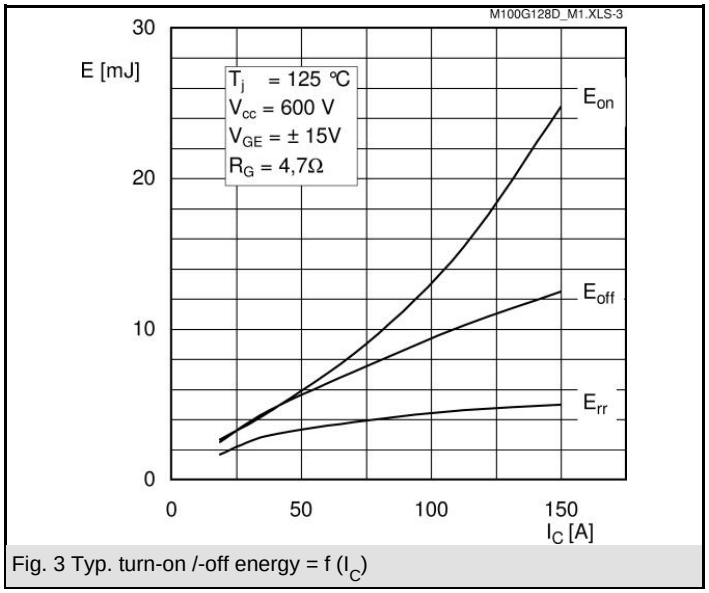


Fig. 3 Typ. turn-on /-off energy = f (I_C)

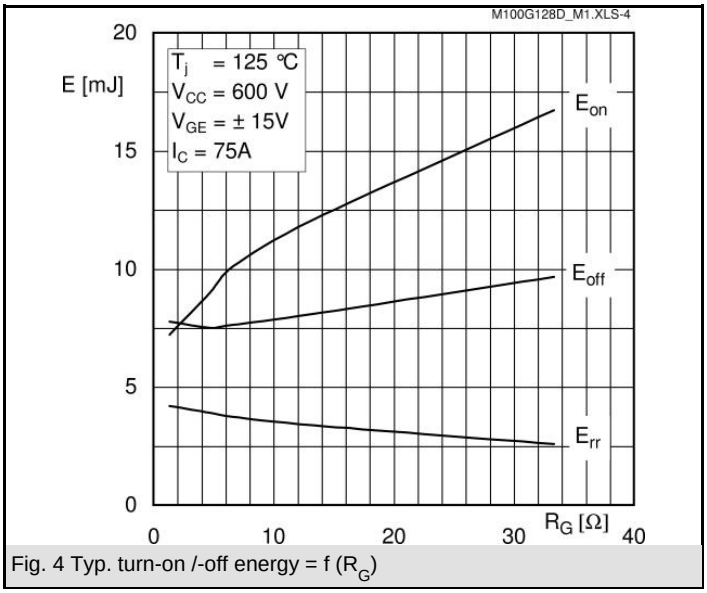


Fig. 4 Typ. turn-on /-off energy = f (R_G)

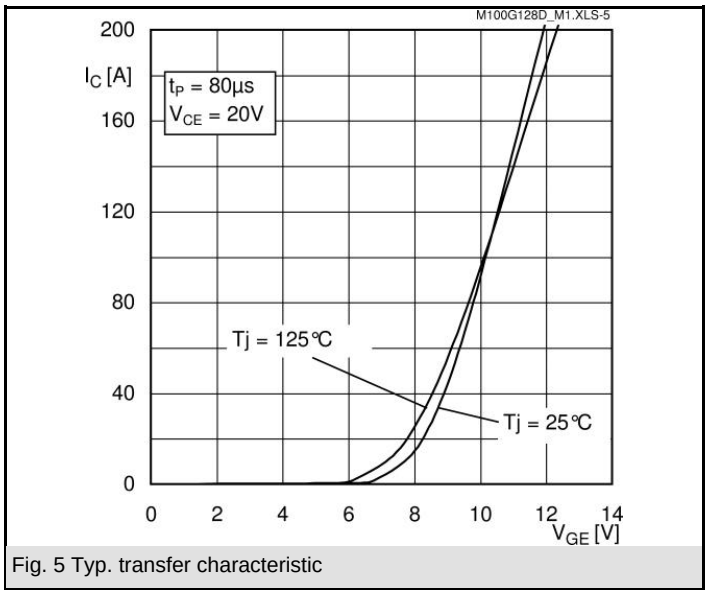


Fig. 5 Typ. transfer characteristic

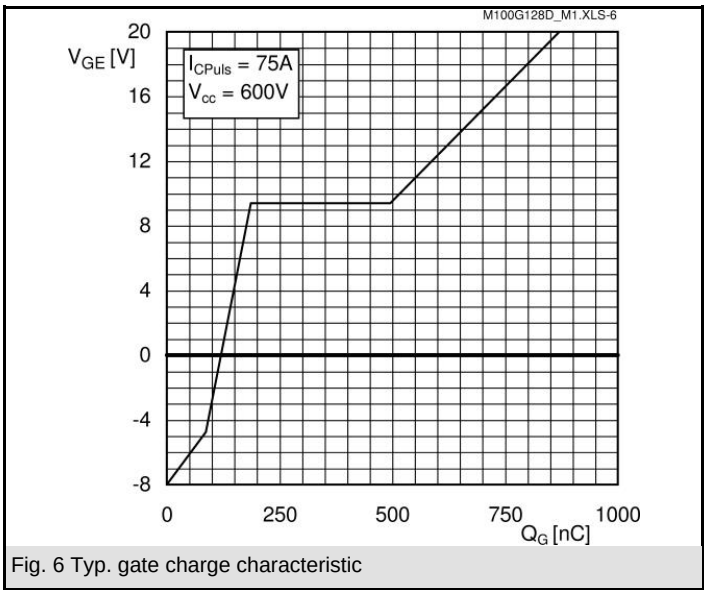


Fig. 6 Typ. gate charge characteristic

 © by SEMIKRON

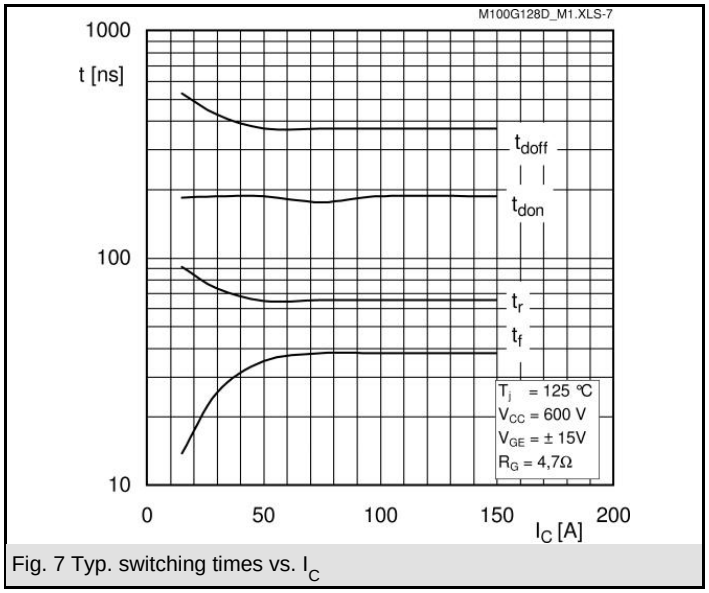


Fig. 7 Typ. switching times vs. I_C

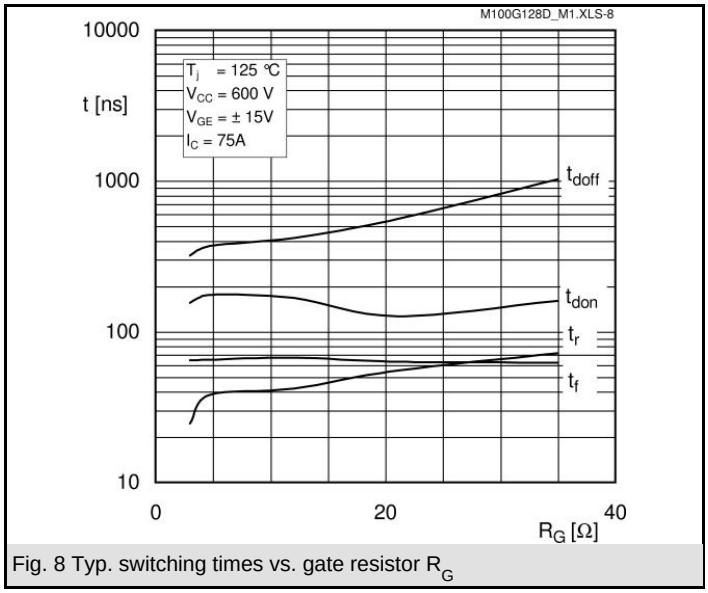


Fig. 8 Typ. switching times vs. gate resistor R_G

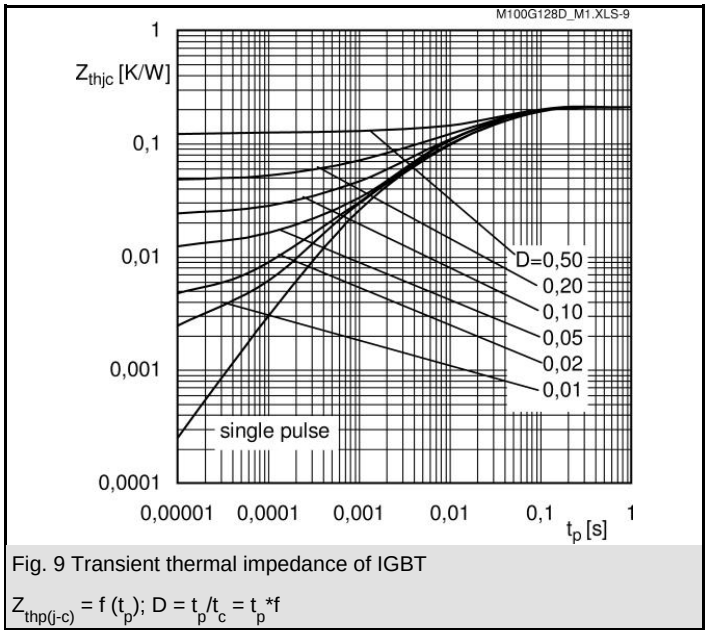


Fig. 9 Transient thermal impedance of IGBT

$Z_{thp(j-c)} = f(t_p)$; $D = t_p/t_c = t_p * f$

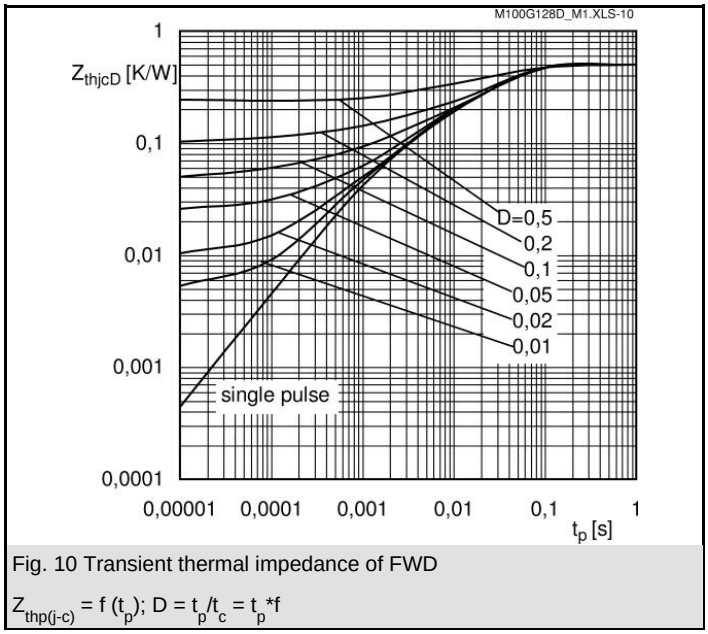


Fig. 10 Transient thermal impedance of FWD

$Z_{thp(j-c)} = f(t_p)$; $D = t_p/t_c = t_p * f$

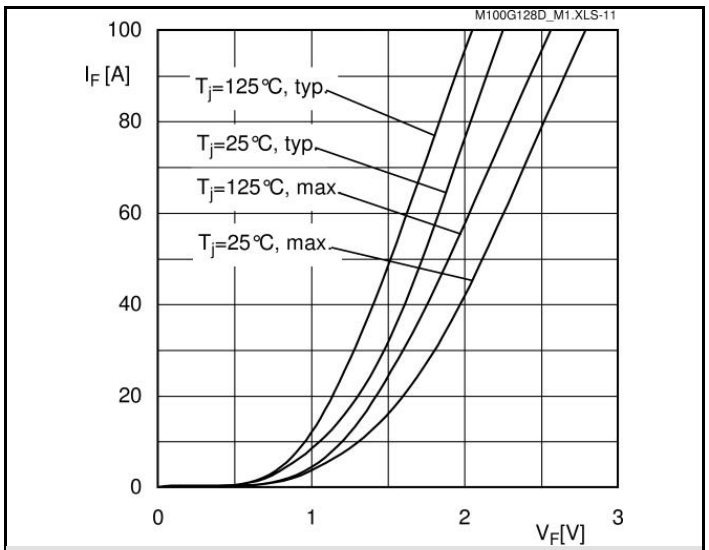


Fig. 11 CAL diode forward characteristic

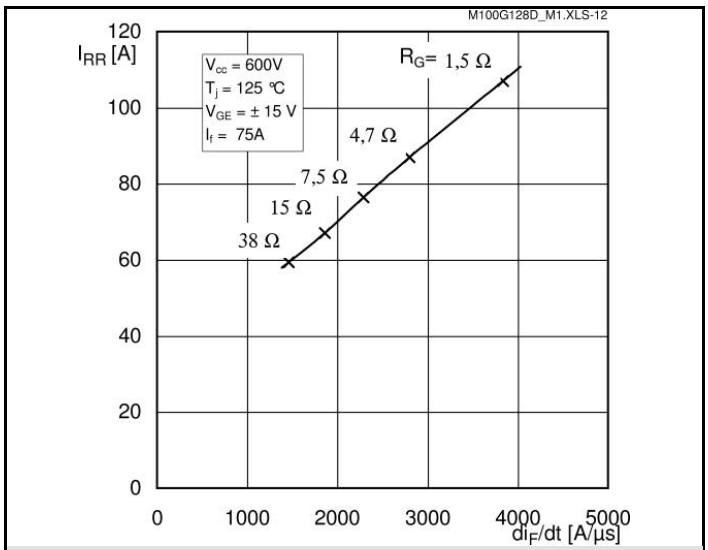


Fig. 12 Typ. CAL diode peak reverse recovery current

 © by SEMIKRON


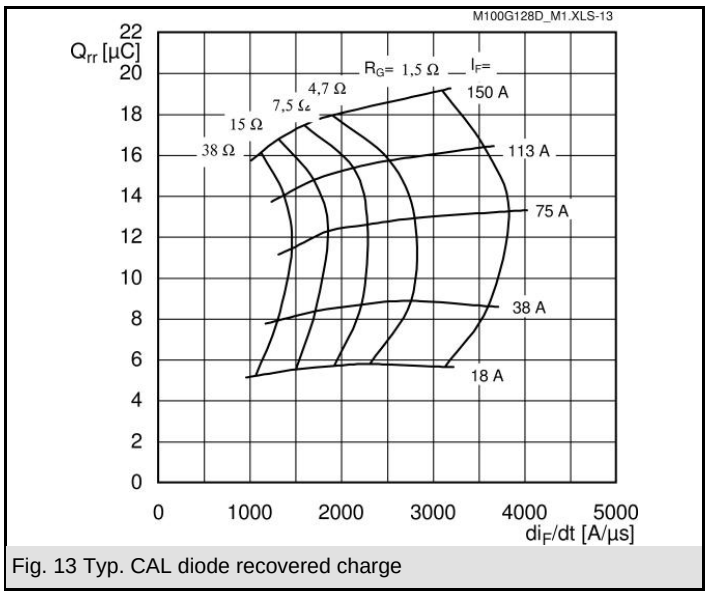


Fig. 13 Typ. CAL diode recovered charge


UL Recognized
File no. E 63 532

Dimensions in mm

CASED61

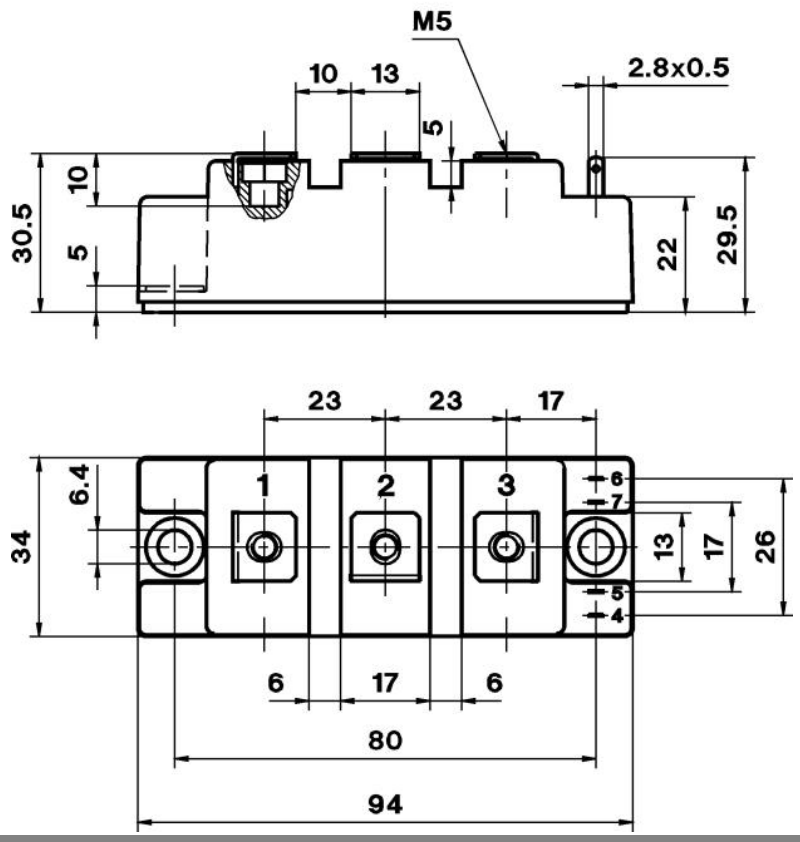

Case D 61

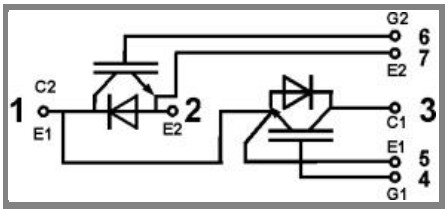

GB Case D 61

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

 © by SEMIKRON