Bulletin I25167 rev. C 03/03

International
IOR Rectifier

ST110S SERIES

PHASE CONTROL THYRISTORS **Stud Version**

Features

- Center gate
- Hermetic metal case with ceramic insulator (Glass-metal seal over 1200V)
- International standard case TO-209AC (TO-94)
- Compression Bonded Encapsulation for heavy duty operations such as severe thermal cycling

110A

Typical Applications

- DC motor controls
- Controlled DC power supplies
- AC controllers

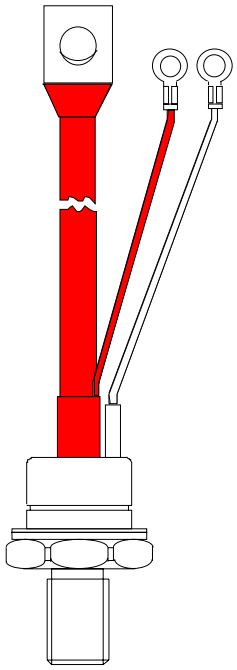

case style
TO-209AC (TO-94)

Major Ratings and Characteristics

Parameters		ST110S	Units
$I_{T(AV)}$		110	A
	@ T_C	90	°C
$I_{T(RMS)}$		175	A
I_{TSM}	@ 50Hz	2700	A
	@ 60Hz	2830	A
I^2t	@ 50Hz	36.4	KA^2s
	@ 60Hz	33.2	KA^2s
V_{DRM}/V_{RRM}		400 to 1600	V
t_q	typical	100	µs
T_J		- 40 to 125	°C

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{DRM}/V_{RRM}, max. repetitive peak and off-state voltage V	V_{RSM}, maximum non-repetitive peak voltage V	I_{DRM}/I_{RRM} max. @ $T_J = T_J$ max mA
ST110S	04	400	500	20
	08	800	900	
	12	1200	1300	
	16	1600	1700	

On-state Conduction

	Parameter	ST110S	Units	Conditions		
$I_{T(AV)}$	Max. average on-state current	110	A	180° conduction, half sine wave		
	@ Case temperature	90	°C			
$I_{T(RMS)}$	Max. RMS on-state current	175	A	DC @ 85°C case temperature		
I_{TSM}	Max. peak, one-cycle non-repetitive surge current	2700	A	t = 10ms	No voltage reapplied	Sinusoidal half wave, Initial $T_J = T_J$ max.
		2830		t = 8.3ms		
		2270		t = 10ms	100% V_{RRM} reapplied	
		2380		t = 8.3ms		
I^2t	Maximum I^2t for fusing	36.4	KA^2s	t = 10ms	No voltage reapplied	
		33.2		t = 8.3ms		
		25.8		t = 10ms	100% V_{RRM} reapplied	
		23.5		t = 8.3ms		
$I^2\sqrt{t}$	Maximum $I^2\sqrt{t}$ for fusing	364	$KA^2\sqrt{s}$	t = 0.1 to 10ms, no voltage reapplied		
$V_{T(TO)1}$	Low level value of threshold voltage	0.90	V	(16.7% x π x $I_{T(AV)}$ < I < π x $I_{T(AV)}$), $T_J = T_J$ max.		
$V_{T(TO)2}$	High level value of threshold voltage	0.92		(I > π x $I_{T(AV)}$), $T_J = T_J$ max.		
r_{t1}	Low level value of on-state slope resistance	1.79	mΩ	(16.7% x π x $I_{T(AV)}$ < I < π x $I_{T(AV)}$), $T_J = T_J$ max.		
r_{t2}	High level value of on-state slope resistance	1.81		(I > π x $I_{T(AV)}$), $T_J = T_J$ max.		
V_{TM}	Max. on-state voltage	1.52	V	I_{pk}= 350A, $T_J = T_J$ max, t_p = 10ms sine pulse		
I_H	Maximum holding current	600	mA	T_J = 25°C, anode supply 12V resistive load		
I_L	Typical latching current	1000				

Switching

	Parameter	ST110S	Units	Conditions
di/dt	Max. non-repetitive rate of rise of turned-on current	500	A/µs	Gate drive 20V, 20Ω, $t_r \leq$ 1µs $T_J = T_J$ max, anode voltage ≤ 80% V_{DRM}
t_d	Typical delay time	2.0	µs	Gate current 1A, di_g/dt = 1A/µs V_d = 0.67% V_{DRM}, T_J = 25°C
t_q	Typical turn-off time	100		I_{TM} = 100A, $T_J = T_J$ max, di/dt = 10A/µs, V_R = 50V dv/dt = 20V/µs, Gate 0V 100Ω, t_p = 500µs

Blocking

	Parameter	ST110S	Units	Conditions
dv/dt	Maximum critical rate of rise of off-state voltage	500	V/µs	$T_J = T_J$ max. linear to 80% rated V_{DRM}
I_{RRM} I_{DRM}	Max. peak reverse and off-state leakage current	20	mA	$T_J = T_J$ max, rated V_{DRM}/V_{RRM} applied

Triggering

	Parameter	ST110S		Units	Conditions	
P_{GM}	Maximum peak gate power	5		W	$T_J = T_J$ max, $t_p \leq 5$ms	
$P_{G(AV)}$	Maximum average gate power	1			$T_J = T_J$ max, f = 50Hz, d% = 50	
I_{GM}	Max. peak positive gate current	2.0		A	$T_J = T_J$ max, $t_p \leq 5$ms	
$+V_{GM}$	Maximum peak positive gate voltage	20		V	$T_J = T_J$ max, $t_p \leq 5$ms	
$-V_{GM}$	Maximum peak negative gate voltage	5.0				
		TYP.	MAX.			
I_{GT}	DC gate current required to trigger	180	-	mA	T_J = - 40°C	Max. required gate trigger/ current/ voltage are the lowest value which will trigger all units 12V anode-to-cathode applied
		90	150		T_J = 25°C	
		40	-		T_J = 125°C	
V_{GT}	DC gate voltage required to trigger	2.9	-	V	T_J = - 40°C	
		1.8	3.0		T_J = 25°C	
		1.2	-		T_J = 125°C	
I_{GD}	DC gate current not to trigger	10		mA	$T_J = T_J$ max	Max. gate current/ voltage not to trigger is the max. value which will not trigger any unit with rated V_{DRM} anode-to-cathode applied
V_{GD}	DC gate voltage not to trigger	0.25		V		

Thermal and Mechanical Specification

	Parameter	ST110S	Units	Conditions
T_J	Max. operating temperature range	-40 to 125	°C	
T_{stg}	Max. storage temperature range	-40 to 150		
R_{thJC}	Max. thermal resistance, junction to case	0.195	K/W	DC operation
R_{thCS}	Max. thermal resistance, case to heatsink	0.08		Mounting surface, smooth, flat and greased
T	Mounting torque, ± 10%	15.5 (137)	Nm (lbf-in)	Non lubricated threads
		14 (120)		Lubricated threads
wt	Approximate weight	130	g	
	Case style	TO - 209AC (TO-94)		See Outline Table

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistence R_{thJC} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.035	0.025	K/W	$T_J = T_J$ max.
120°	0.041	0.042		
90°	0.052	0.056		
60°	0.076	0.079		
30°	0.126	0.127		

Ordering Information Table

Device Code

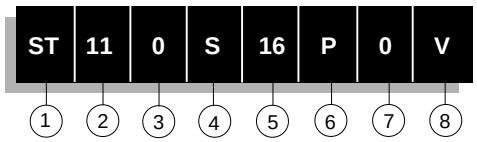

1 - Thyristor
2 - Essential part number
3 - 0 = Converter grade
4 - S = Compression bonding Stud
5 - Voltage code: Code x 100 = V_{RRM} (See Voltage Rating Table)
6 - P = Stud base 1/2"-20UNF-2A threads
7 - 0 = Eyelet terminals (Gate and Auxiliary Cathode Leads)
1 = Fast - on terminals (Gate and Auxiliary Cathode Leads)
8 - V = Glass-metal seal (only up to 1200V)
None = Ceramic housing (over 1200V)

Outline Table

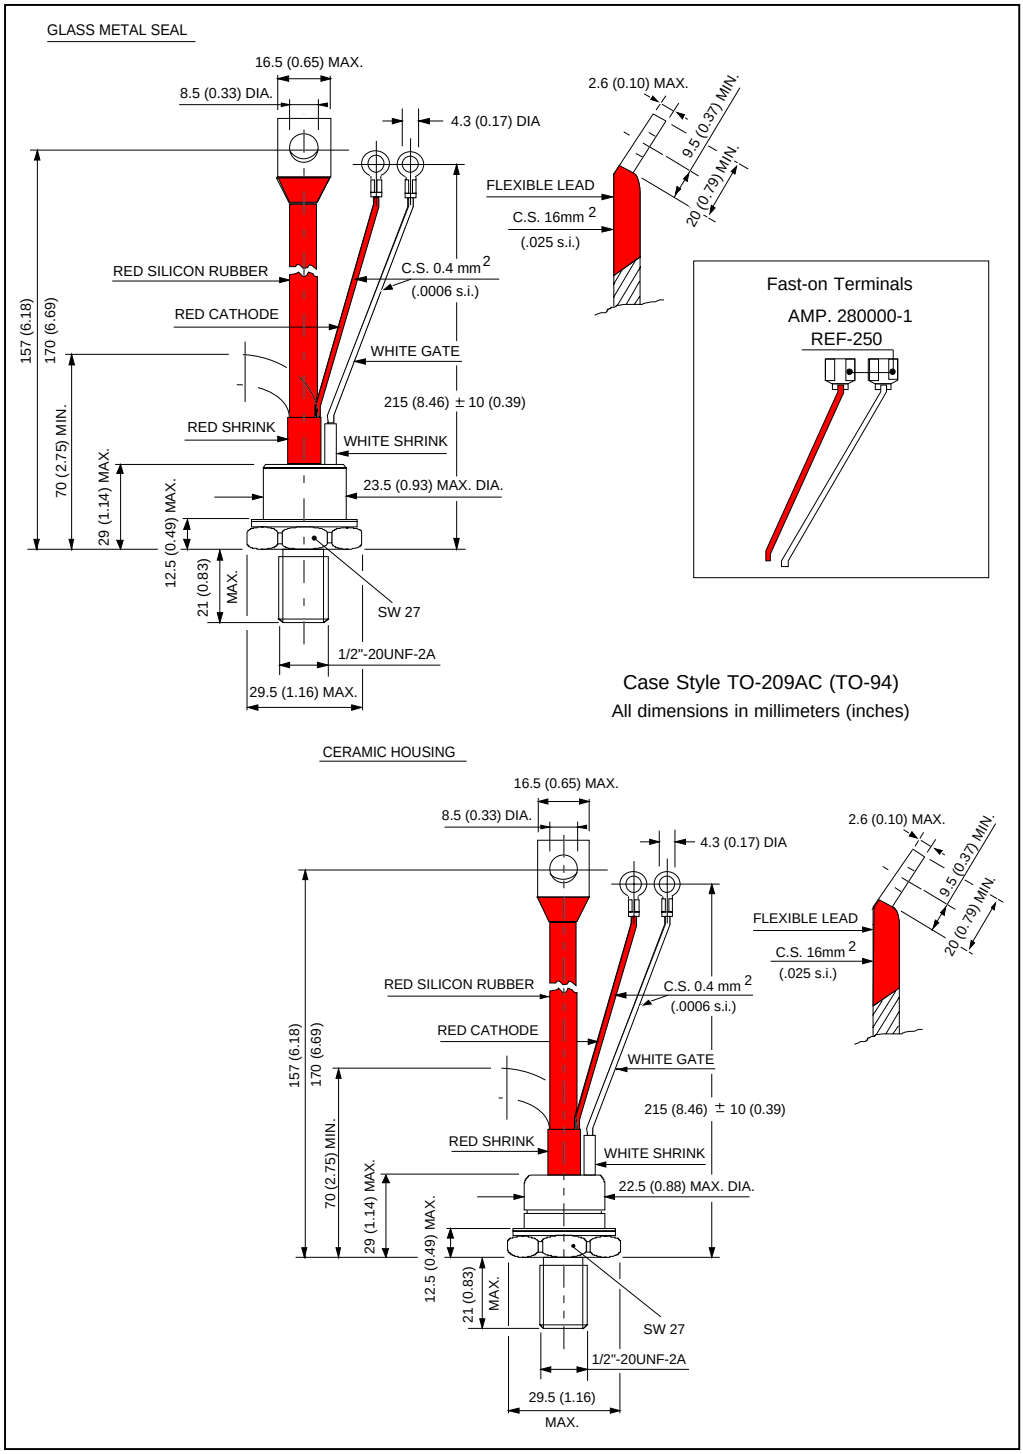

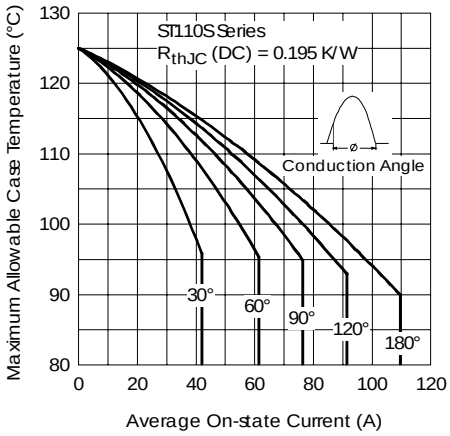

Fig. 1 - Current Ratings Characteristics

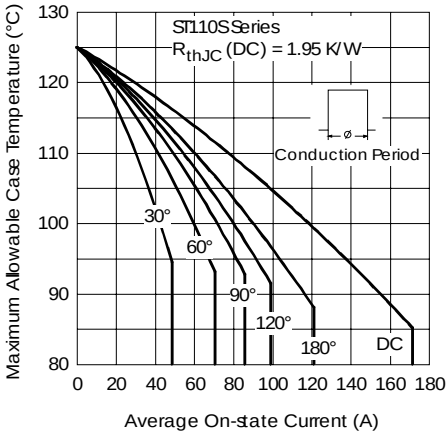

Fig. 2 - Current Ratings Characteristics

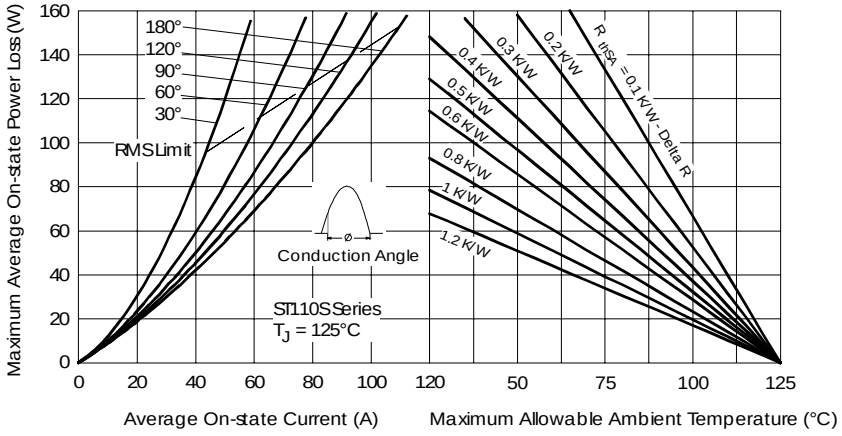

Fig. 3 - On-state Power Loss Characteristics

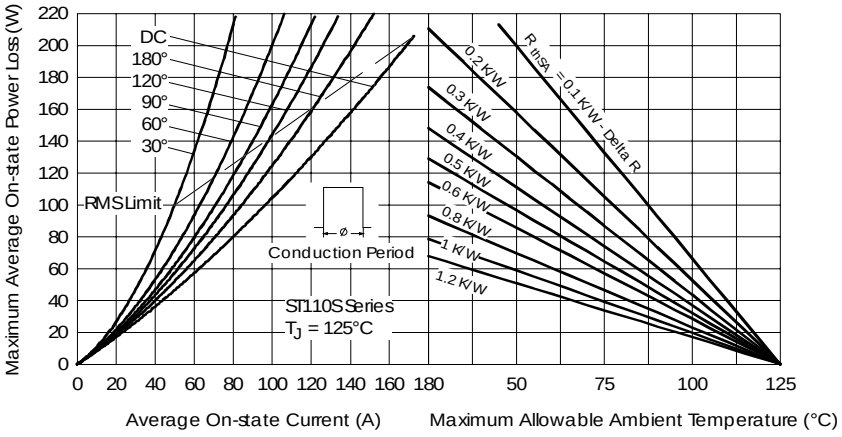

Fig. 4 - On-state Power Loss Characteristics

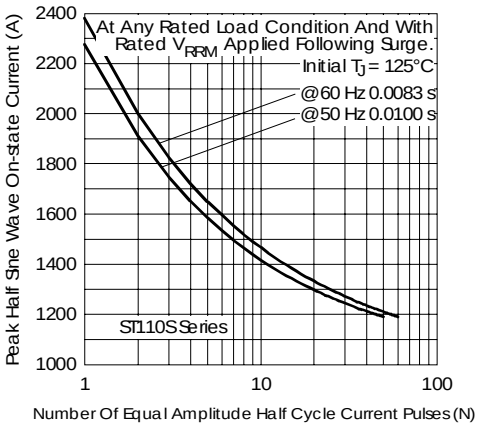

Fig. 5 - Maximum Non-Repetitive Surge Current

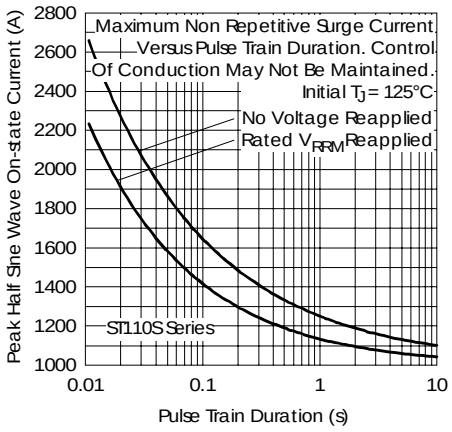

Fig. 6 - Maximum Non-Repetitive Surge Current

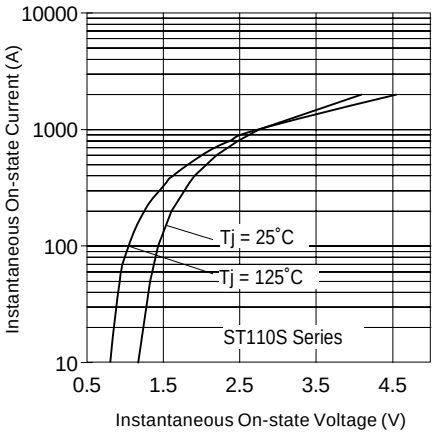

Fig. 7 - On-state Voltage Drop Characteristics

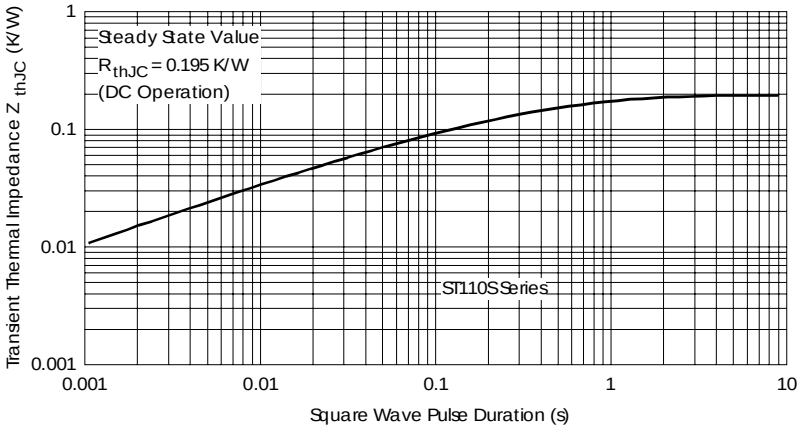

Fig. 8 - Thermal Impedance Z_{thJC} Characteristic

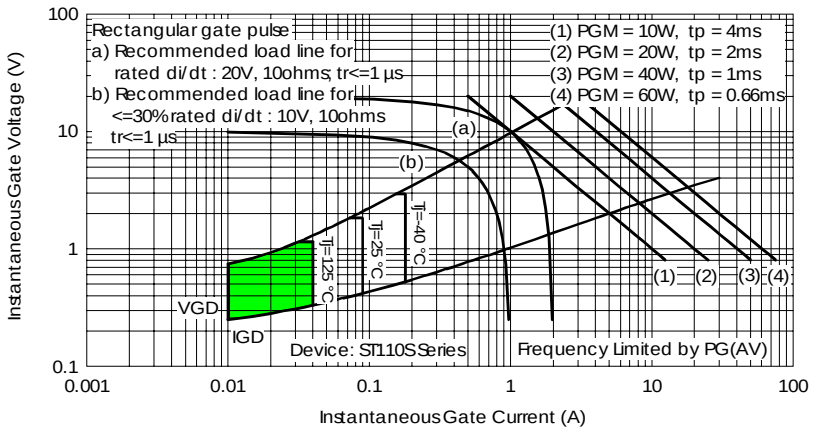

Fig. 9 - Gate Characteristics

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 03/03