IGBT Power Module

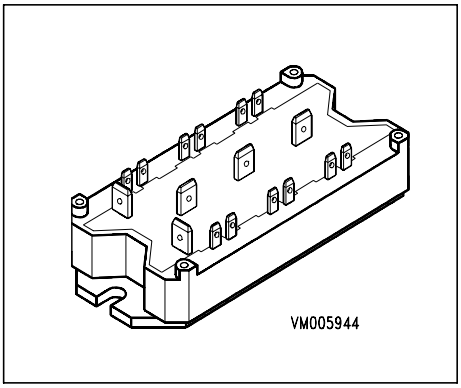

- Power module
- 3-phase full-bridge
- Including fast free-wheel diodes
- Package with insulated metal base plate

Type	V_{CE}	I_C	Package	Ordering Code
BSM 25 GD 120 D2	1200V	35A	SIXPACK 1	C67076-A2505-A17

Maximum Ratings

Parameter	Symbol	Values	Unit
Collector-emitter voltage	V_{CE}	1200	V
Collector-gate voltage R_{GE} = 20 kΩ	V_{CGR}	1200	
Gate-emitter voltage	V_{GE}	± 20	
DC collector current T_C = 25 °C T_C = 80 °C	I_C	35 25	A
Pulsed collector current, t_p = 1 ms T_C = 25 °C T_C = 80 °C	I_{Cpuls}	70 50	
Power dissipation per IGBT T_C = 25 °C	P_{tot}	200	W
Chip temperature	T_j	+ 150	°C
Storage temperature	T_{stg}	-55 ... + 150	
Thermal resistance, chip case	R_{thJC}	≤ 0.6	K/W
Diode thermal resistance, chip case	R_{thJCD}	≤ 1	
Insulation test voltage, t = 1min.	V_{is}	2500	Vac
Creepage distance	-	16	mm
Clearance	-	11	
DIN humidity category, DIN 40 040	-	F	sec
IEC climatic category, DIN IEC 68-1	-	55 / 150 / 56	

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Gate threshold voltage $V_{GE} = V_{CE}$, I_C = 1 mA	$V_{GE(th)}$	4.5	5.5	6.5	V
Collector-emitter saturation voltage V_{GE} = 15 V, I_C = 25 A, T_j = 25 °C V_{GE} = 15 V, I_C = 25 A, T_j = 125 °C	$V_{CE(sat)}$	- -	2.5 3.1	3 3.7	
Zero gate voltage collector current V_{CE} = 1200 V, V_{GE} = 0 V, T_j = 25 °C V_{CE} = 1200 V, V_{GE} = 0 V, T_j = 125 °C	I_{CES}	- -	0.5 2	0.8 -	mA
Gate-emitter leakage current V_{GE} = 20 V, V_{CE} = 0 V	I_{GES}	-	-	180	nA
AC Characteristics					
Transconductance V_{CE} = 20 V, I_C = 25 A	g_{fs}	10	-	-	S
Input capacitance V_{CE} = 25 V, V_{GE} = 0 V, f = 1 MHz	C_{iss}	-	1650	-	pF
Output capacitance V_{CE} = 25 V, V_{GE} = 0 V, f = 1 MHz	C_{oss}	-	250	-	
Reverse transfer capacitance V_{CE} = 25 V, V_{GE} = 0 V, f = 1 MHz	C_{rss}	-	110	-	

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Switching Characteristics, Inductive Load at T_j = 125 °C					
Turn-on delay time V_{CC} = 600 V, V_{GE} = 15 V, I_C = 25 A R_{Gon} = 47 Ω	$t_{d(on)}$	-	75	150	ns
Rise time V_{CC} = 600 V, V_{GE} = 15 V, I_C = 25 A R_{Gon} = 47 Ω	t_r	-	65	130	
Turn-off delay time V_{CC} = 600 V, V_{GE} = -15 V, I_C = 25 A R_{Goff} = 47 Ω	$t_{d(off)}$	-	420	630	
Fall time V_{CC} = 600 V, V_{GE} = -15 V, I_C = 25 A R_{Goff} = 47 Ω	t_f	-	50	100	
Free-Wheel Diode					
Diode forward voltage I_F = 25 A, V_{GE} = 0 V, T_j = 25 °C I_F = 25 A, V_{GE} = 0 V, T_j = 125 °C	V_F	- -	2.3 1.8	2.8 -	V
Reverse recovery time I_F = 25 A, V_R = -600 V, V_{GE} = 0 V di_F/dt = -800 A/µs, T_j = 125 °C	t_{rr}	-	0.13	-	µs
Reverse recovery charge I_F = 25 A, V_R = -600 V, V_{GE} = 0 V di_F/dt = -800 A/µs T_j = 25 °C T_j = 125 °C	Q_{rr}	- -	2.3 6	- -	µC

Power dissipation

$P_{tot} = f(T_C)$

parameter: $T_j \leq 150$ °C

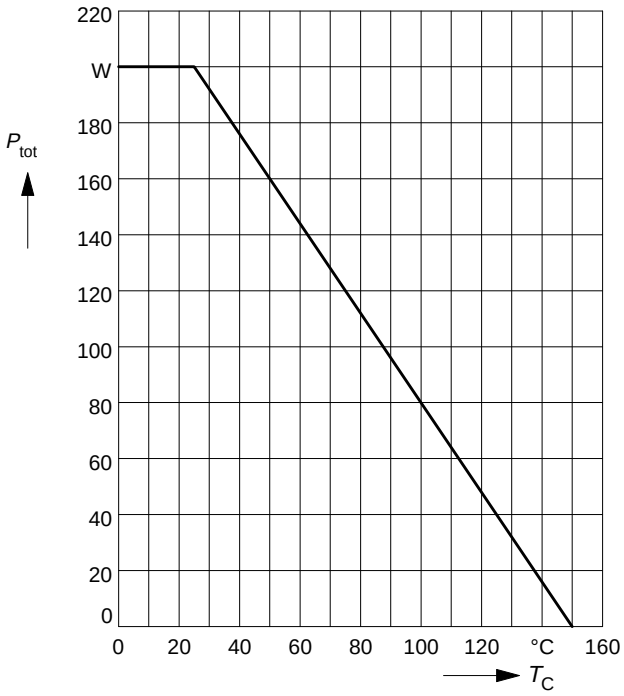

Safe operating area

$I_C = f(V_{CE})$

parameter: $D = 0$, $T_C = 25$°C , $T_j \leq 150$ °C

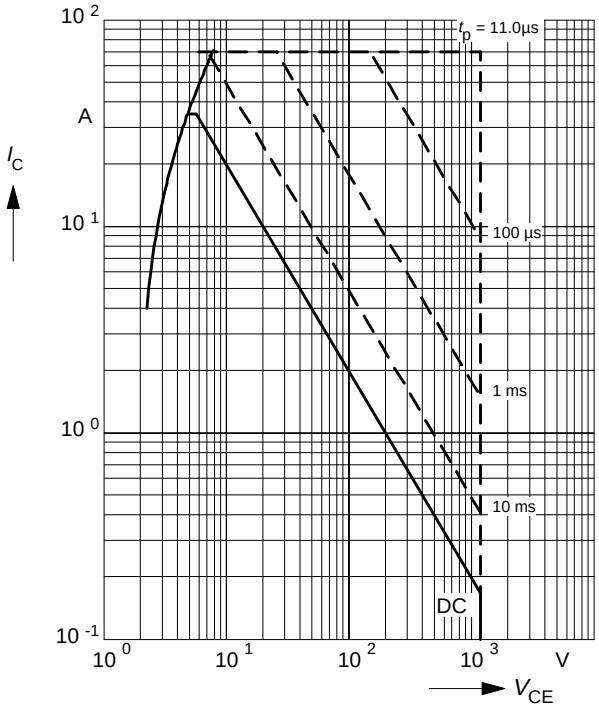

Collector current

$I_C = f(T_C)$

parameter: $V_{GE} \geq 15$ V , $T_j \leq 150$ °C

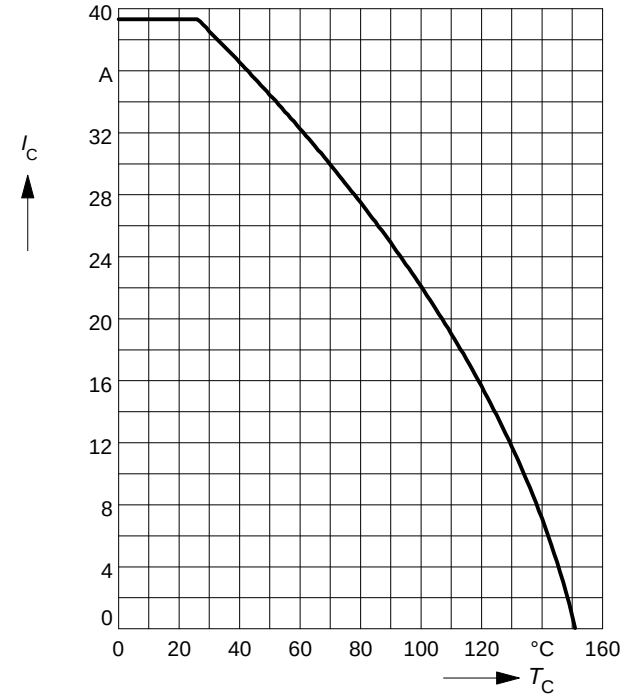

Transient thermal impedance IGBT

$Z_{th\ JC} = f(t_p)$

parameter: $D = t_p / T$

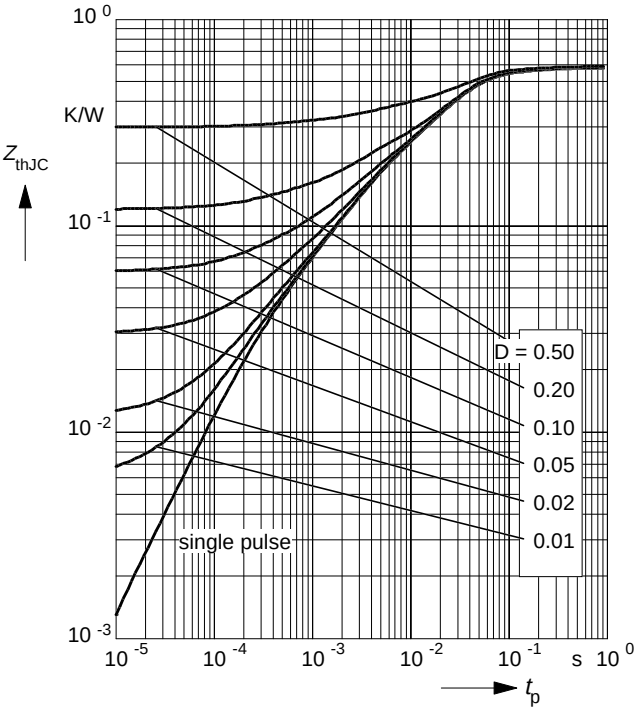

Typ. output characteristics

$I_C = f(V_{CE})$

parameter: t_p = 80 µs, T_j = 25 °C

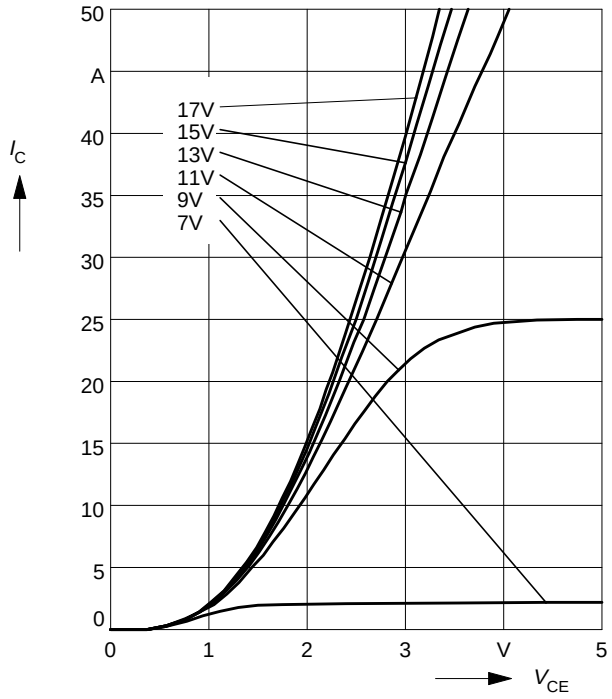

Typ. output characteristics

$I_C = f(V_{CE})$

parameter: t_p = 80 µs, T_j = 125 °C

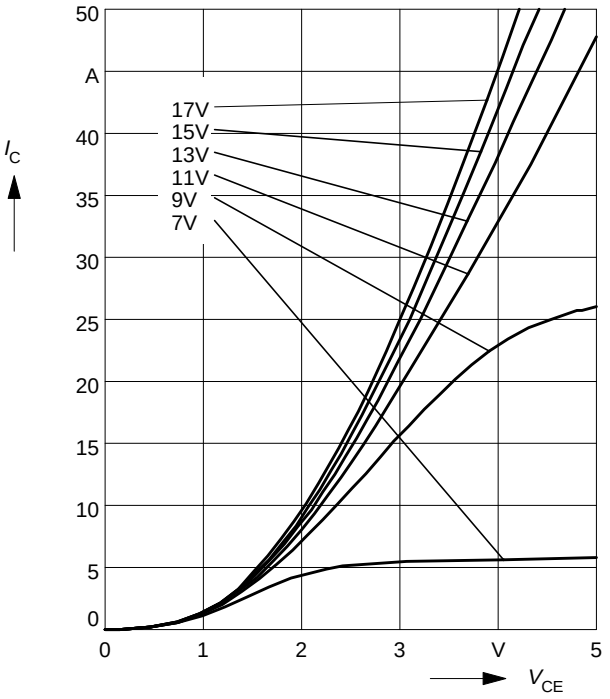

Typ. transfer characteristics

$I_C = f(V_{GE})$

parameter: t_p = 80 µs, V_{CE} = 20 V

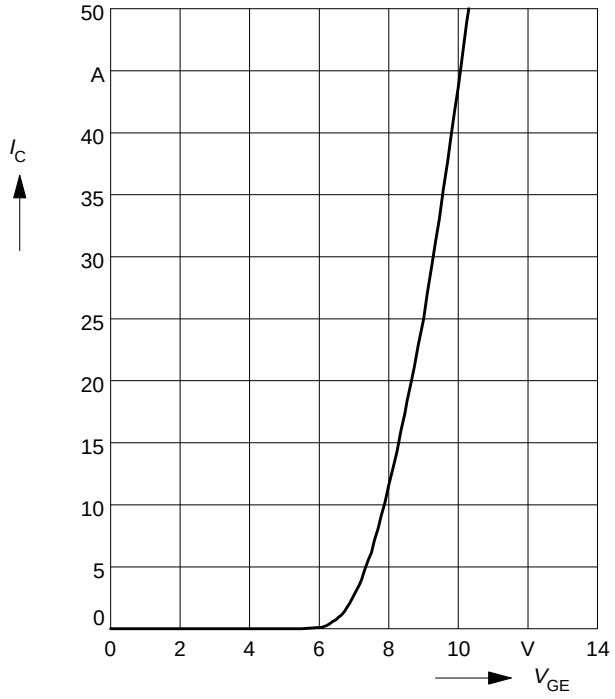

Typ. gate charge

$V_{GE} = f(Q_{Gate})$

parameter: $I_{C\ puls}$ = 25 A

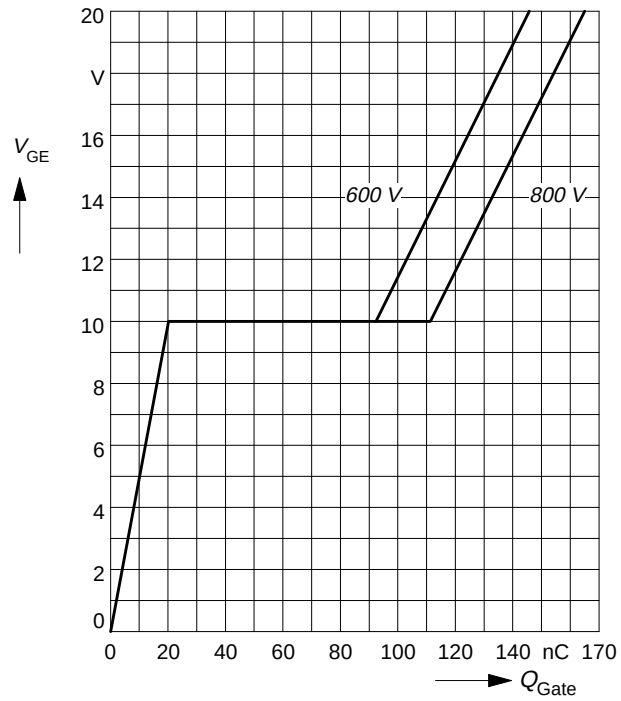

Typ. capacitances

$C = f(V_{CE})$

parameter: V_{GE} = 0 V, f = 1 MHz

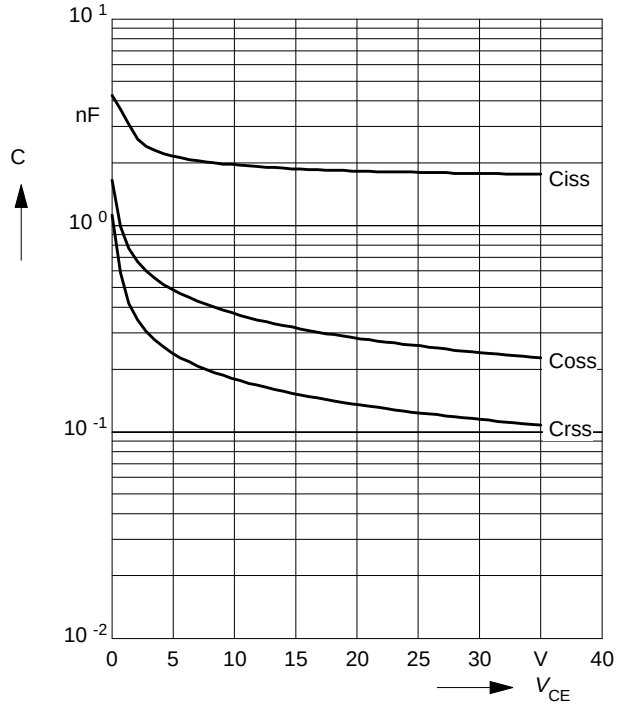

Reverse biased safe operating area

$I_{Cpuls} = f(V_{CE})$, T_j = 150°C

parameter: V_{GE} = 15 V

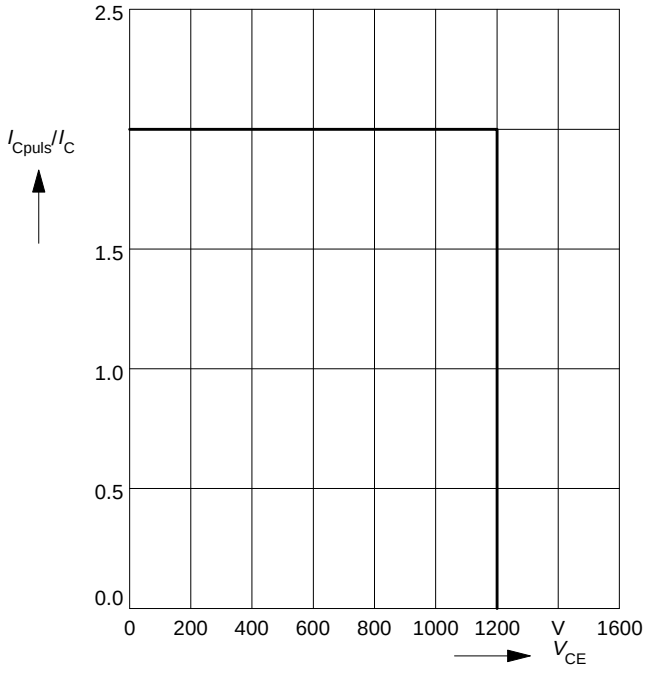

Short circuit safe operating area

$I_{Csc} = f(V_{CE})$, T_j = 150°C

parameter: V_{GE} = ± 15 V, t_{SC} ≤ 10 µs, L < 50 nH

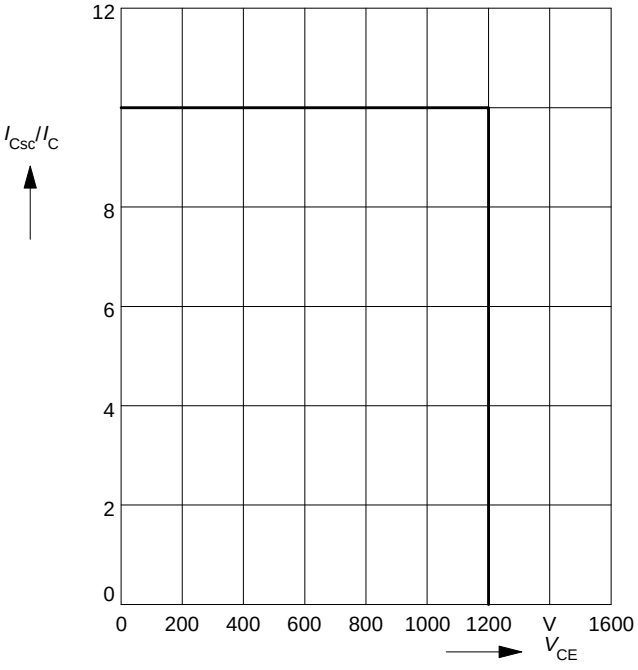

Typ. switching time

$I = f(I_C)$, inductive load , T_j = 125°C

par.: V_{CE} = 600 V, V_{GE} = ± 15 V, R_G = 47 Ω

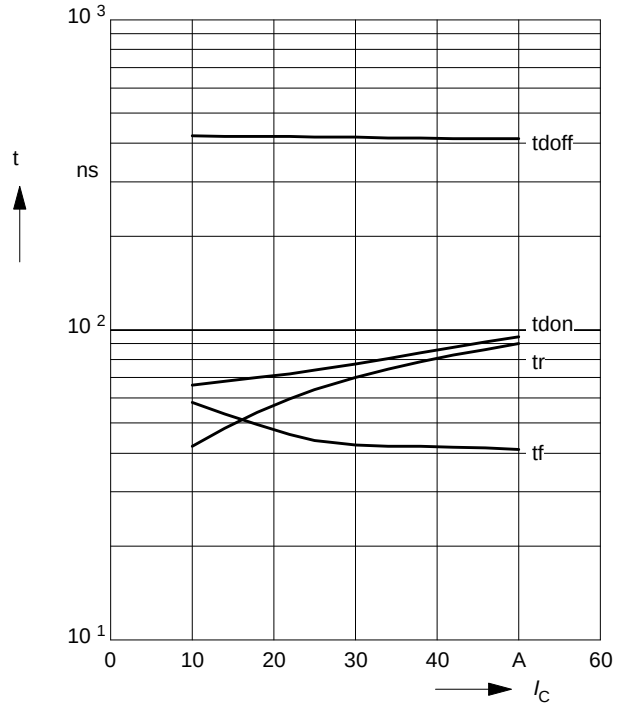

Typ. switching time

$t = f(R_G)$, inductive load , T_j = 125°C

par.: V_{CE} = 600 V, V_{GE} = ± 15 V, I_C = 25 A

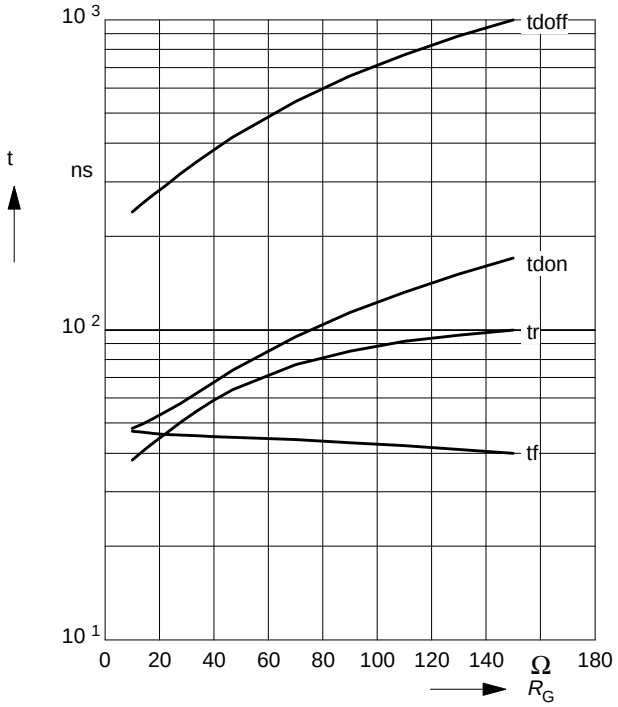

Typ. switching losses

$E = f(I_C)$, inductive load , T_j = 125°C

par.: V_{CE} = 600 V, V_{GE} = ± 15 V, R_G = 47 Ω

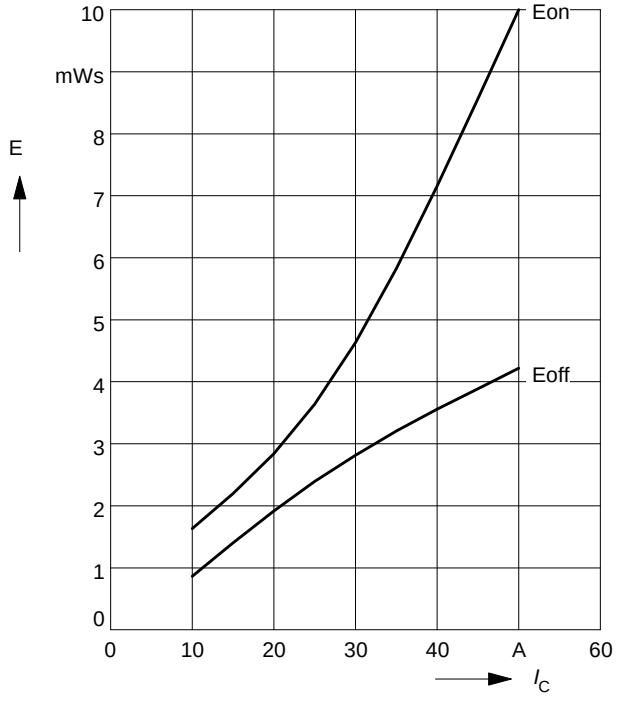

Typ. switching losses

$E = f(R_G)$, inductive load , T_j = 125°C

par.: V_{CE} = 600V, V_{GE} = ± 15 V, I_C = 25 A

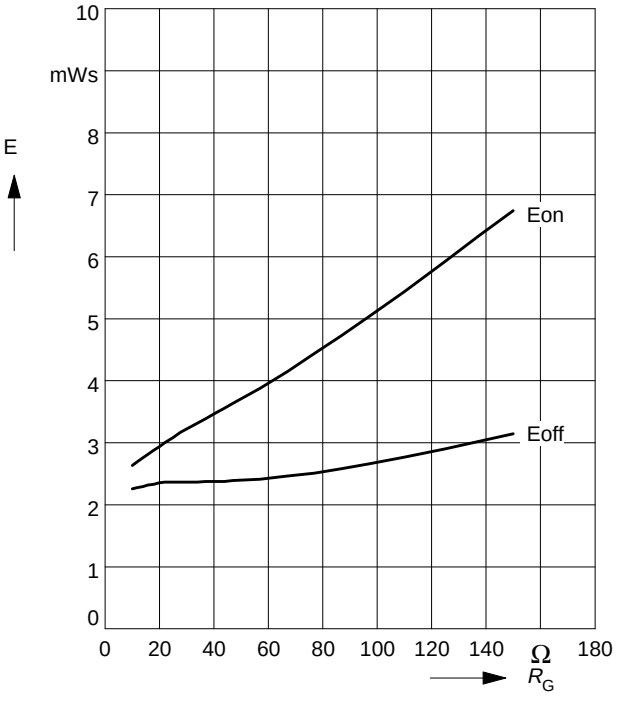

Forward characteristics of fast recovery reverse diode $I_F = f(V_F)$

parameter: T_j

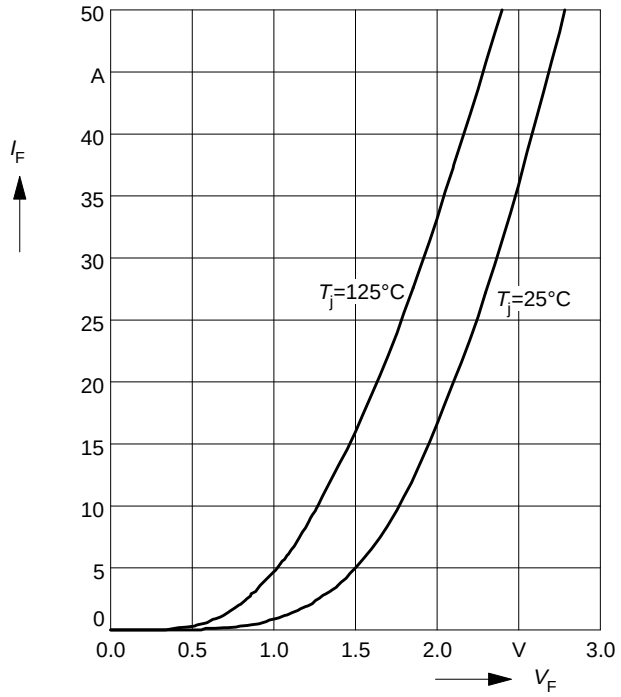

Transient thermal impedance Diode

$Z_{th\ JC} = f(t_p)$

parameter: $D = t_p / T$

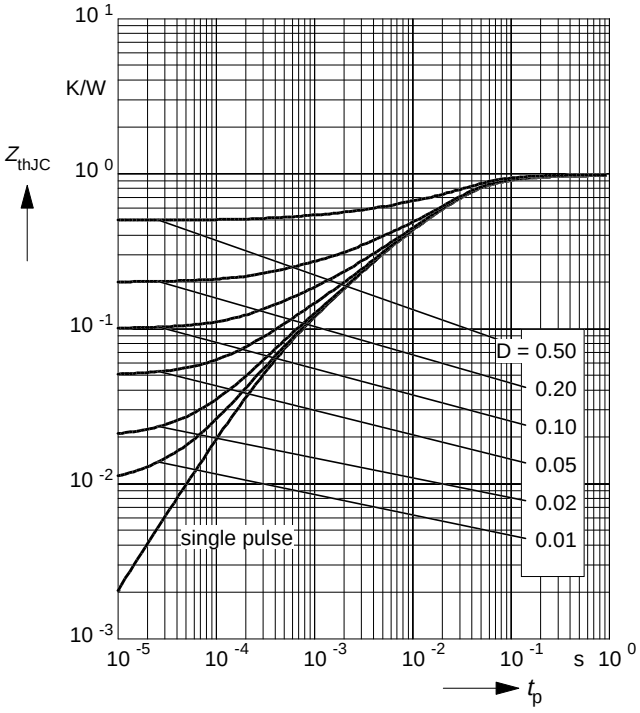

Circuit Diagram

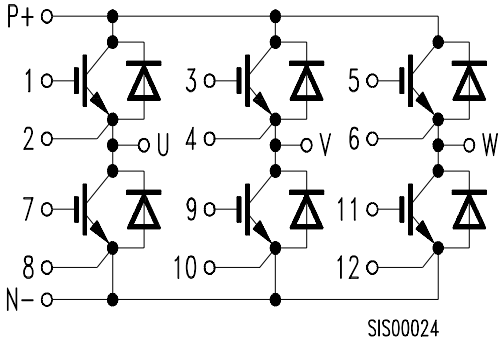

Package Outlines

Dimensions in mm

Weight: 190 g

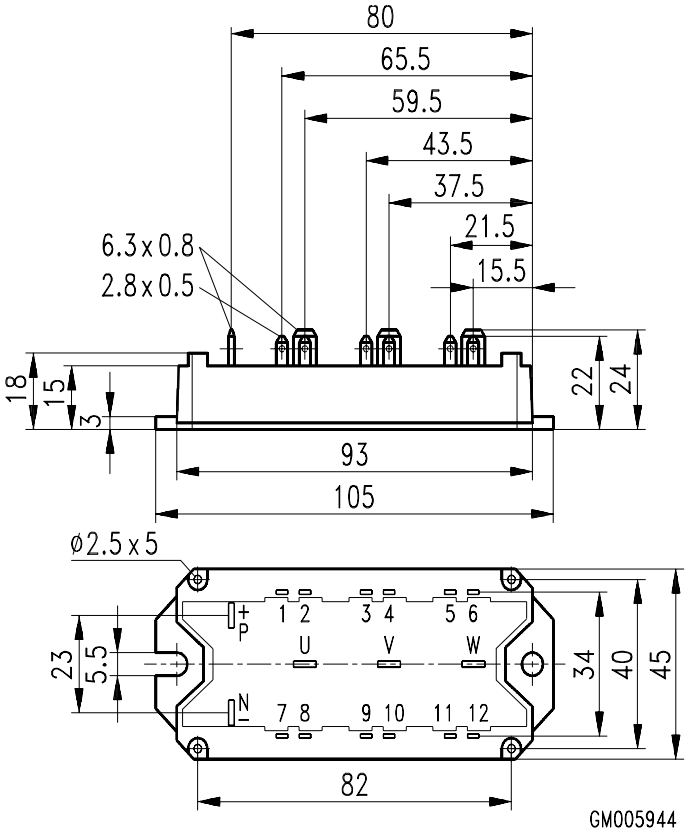

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.